

BLUETTI PV200 SOLAR PANEL

GENERAL

Connector: Standard MC4 Connector

Weight: 16,1lbs (7,3kg)

Dimensions (Unfolded): 23,2 × 89,2in
(59 × 226,5cm)

Dimensions (Folded): 23,2 × 24,8inch
(59 × 60cm)

Operating Temperature: 14-149°F
(-10-65°C)

Best Working Temperature: 77°F
(25°C)

Cable Length: 118in (3m)

Certifications: FCC, CE, ROHS

Warranty: 12 Months

POWER

Model: PV200

Power: 200W

Lamination: ETFE (Ethylene tetrafluoroethylene)

Cell Type: Monocrystalline Silicon


Cell Efficiency: Up to 23,4%

Voltage at Max Power(Vmp):
20,5V

Current at Max Power(Imp): 9,7A

Open Circuit Voltage(OCV): 26,1V

Short Circuit Current(Isc): 10,3A

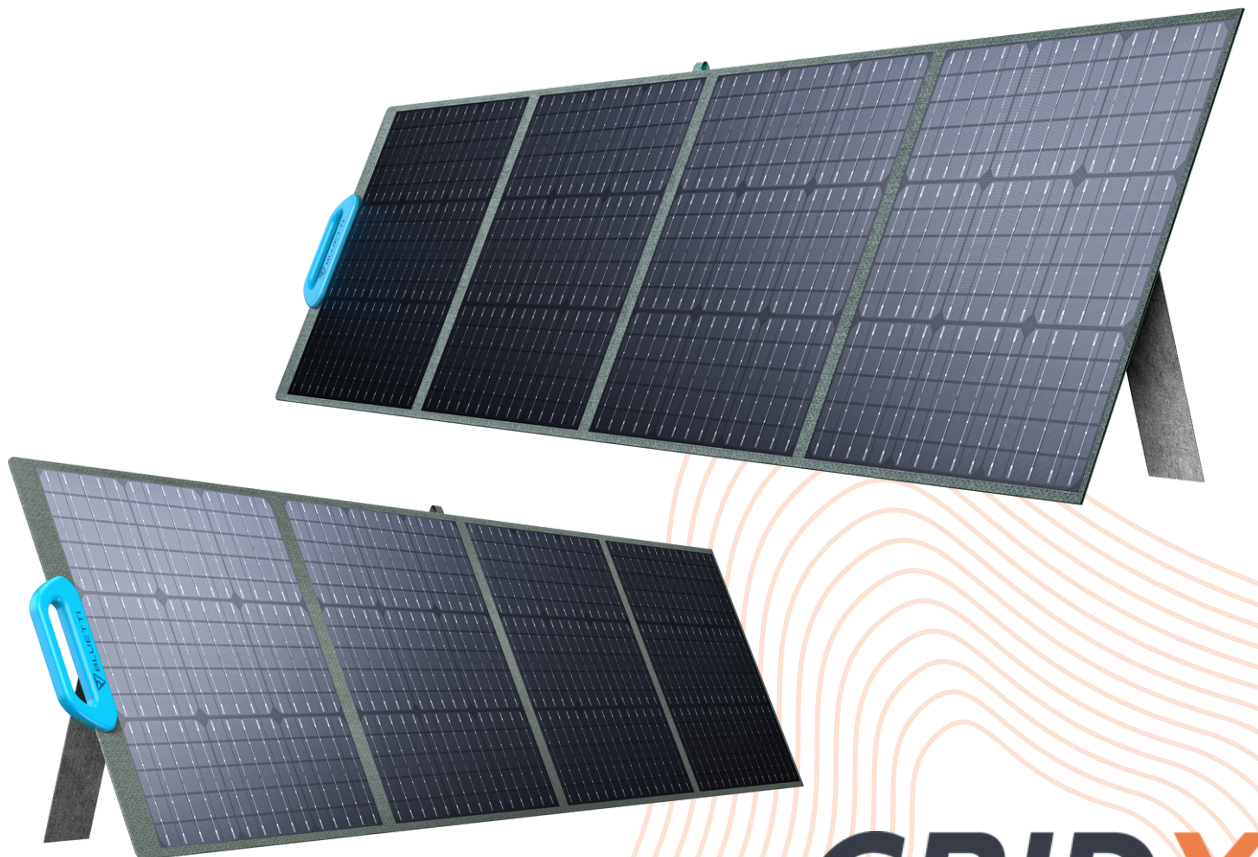

GRIDX
metering and control